



TAPADIA POLYESTERS PVT LTD

D4, Butibori MIDC, Butibori - 441122 Maharashtra, India
Mobile: +91 9823652225
salestapadia@gmail.com | www.tapadiapolyesters.com


TAPADIA POLYESTERS

PRODUCT DATA SHEET

T-PET

PRM

Film Structure

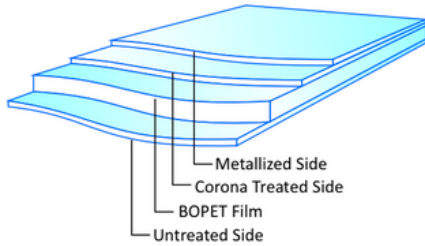

Product Description:

PRM grade is a Biaxially Oriented Vacuum Metallized Polyester Film with enhanced barrier and high gloss properties. The base film used is one side corona treated polyester film. Metallization can be done on corona/untreated side of base film.

Key Features:

- i. Excellent machinability & handling properties
- ii. Good mechanical, surface & thermal properties

Application:

- i. Flexible Packaging Printing, Coating, Lamination
- ii. Flexible Air Ducts & Air Connectors

Property		Unit	Test Method	Typical Value
Thickness		Micron	Internal	10,12
Yield		m ² /kg	Internal	59.5
Tensile Strength	MD	Kg/cm ²	ASTM D 882	1900
	TD			2000
Elongation	MD	%	ASTM D 882	105
	TD			85
Heat Shrinkage 150°C 30 min	MD	%	ASTM D 1204	2.0
	TD			0.4
Co-Efficient of Friction	Static	---	ASTM D 1894	0.55
	Dynamic			0.50
WVTR (38 °C & 90%RH) (Max)		gm/m ² /day	ASTM F 1249	1.0
OTR (23 °C & 0%RH) (Max)		cc/m ² /day	ASTM D 3985	1.2
Optical Density (±5%)		---	Optel Make Instrument	2.0
Metal Bond Strength (Min)		Gm/25mm	AIMCAL TP 105-92	150

MD= MACHINE DIRECTION *TD= TRANSVERSE DIRECTION

The data above only represents 12 Micron, specific data for other microns will be provided on request.

STORAGE & HANDLING

T-PET does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties. It is advisable to use the material on FIFO basis. The film should be kept at operating environment for 24 hours before processing. T-PET is best suitable for use up to 3 months from date of dispatch.

FOOD CONTACT

T-PET complies with EC and FDA regulations. Specific document and MSDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our product(s) is safe, lawful, and technically suitable in their intended applications. The Values given in the technical data sheet represent typical values based on the best of our knowledge as on date when the data was compiled. It is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability I compatibility in all respects. TPPL gives no warranty or accept liability for any loss and fitness of the product for any specific purpose. TPPL serves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information.

****TDS issued on 08th July 2025 . All Previous versions for this grade are invalid.**